



Yuasa Fiche de données techniques

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5075 - Batteries SMF YBX5000 Silver Haute Performance

Performance

Tension	12V
Capacité (20 heures)	60Ah
Performances en démarrage à froid (EN1)	640A

Dimensions

Longueur	243mm
Largeur	175mm
Hauteur	175mm



Poids & Mesures

Poids moyen avec acide	14.7kg
------------------------	--------

Caractéristiques du bac

Type de bac	LB2 DIN
Système de fixation	B13B14
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W4-C2-V3-E1

Type de bornes

T1

Standard DIN Post



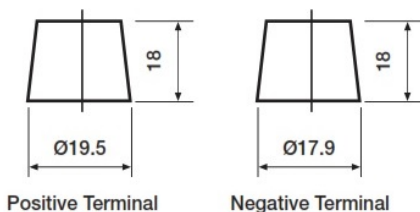


Schéma de montage des éléments

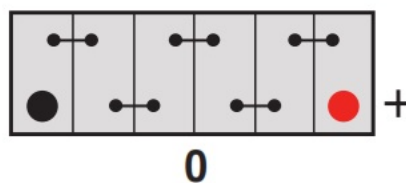

Système de fixation de la batterie

B3/B4 (B3 with Hold-Down adaptor)

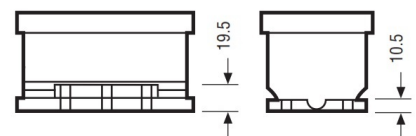

Date de publication: 10/02/2021 - E&OE



Yuasa Technical Data Sheet

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Yuasa YBX5075 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	640A

Dimensions

Length	243mm
Width	175mm
Height	175mm

Weights & Measures

Mean Weight with Acid	14.7kg
-----------------------	--------



Container Features

Case Type	LB2 DIN
Hold Down	B13B14
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W4-C2-V3-E1

Terminal Type

T1


Standard DIN Post

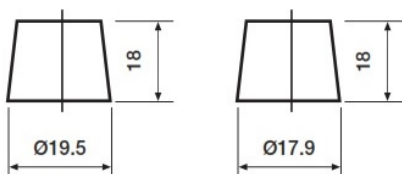

Positive Terminal


Negative Terminal

Cell Assembly Layout

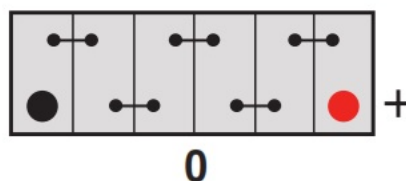

Battery Hold-down

B3/B4 (B3 with Hold-Down adaptor)

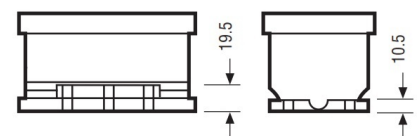

Data Sheet generated on 10/02/2021 - E&OE