



Yuasa Fiche de données techniques

Yuasa YBX3086 - Batteries SMF YBX3000

Performance

Tension	12V
Capacité (20 heures)	76Ah
Performances en démarrage à froid (EN1)	680A

Dimensions

Longueur	278mm
Largeur	175mm
Hauteur	190mm



Poids & Mesures

Poids moyen avec acide	19kg
------------------------	------

Caractéristiques du bac

Type de bac	L3 DIN
Schéma de montage	1
Système de fixation	B3
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)

Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W3-C2-V2-E1

Type de bornes

T1


Standard DIN Post




Positive Terminal

Negative Terminal

Schéma de montage des éléments

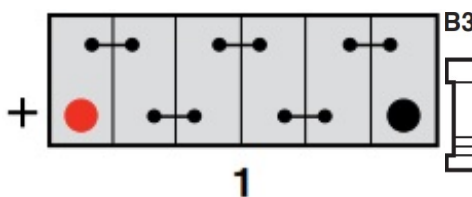

Système de fixation de la batterie

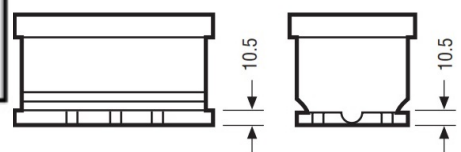

Date de publication: 10/02/2021 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX3086 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	76Ah
Cold Cranking Amps (EN1)	680A

Dimensions

Length	278mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	19kg
-----------------------	------



Container Features

Case Type	L3 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

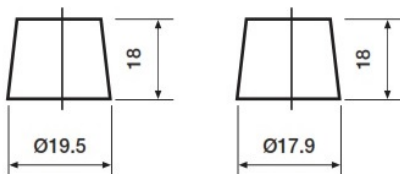


Positive Terminal

Negative Terminal

Cell Assembly Layout

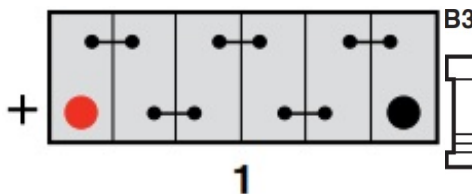

Battery Hold-down

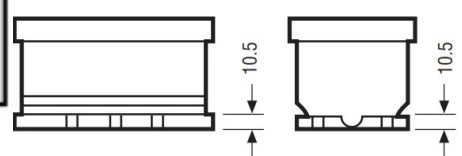

Data Sheet generated on 10/02/2021 - E&OE