



## Yuasa Fiche de données techniques

### Yuasa YBX5625 - Super Heavy Duty Battery

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Tension	12V
Capacité (20 heures)	230Ah
Performances en démarrage à froid (EN1)	1350A

#### Dimensions

Longueur	516mm
Largeur	274mm
Hauteur	236mm



#### Poids & Mesures

Poids moyen avec acide	56.7kg
------------------------	--------

#### Caractéristiques du bac

Type de bac	DIN C
Schéma de montage	3
Système de fixation	N
Indicateur de l'état de charge	✓
Poignées	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


#### Technologie

Technologie	Ca/Ca
Taux de charge recommandé	12A
Performance Marking	W3-C2-V4-M1

#### Type de bornes

##### T1


Standard DIN Post

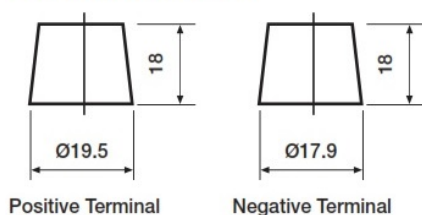

Positive Terminal

Negative Terminal

#### Schéma de montage des éléments

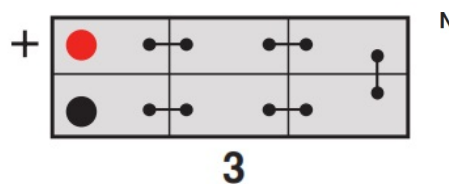

#### Système de fixation de la batterie



Date de publication: 11/02/2021 - E&OE



## Yuasa Technical Data Sheet

### Yuasa YBX5625 - Super Heavy Duty Battery

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	230Ah
Cold Cranking Amps (EN1)	1350A

#### Dimensions

Length	516mm
Width	274mm
Height	236mm

#### Weights & Measures

Mean Weight with Acid	56.7kg
-----------------------	--------



#### Container Features

Case Type	DIN C
Cell Layout	3
Hold Down	N
State of Charge Indicator	✓
Handles	✓
Lid Type	SMF Double Lid


#### Technology

Technology	Ca/Ca
Recommended Charge Rate	12A
Performance Marking	W3-C2-V4-M1


#### Terminal Type

##### T1

Standard DIN Post

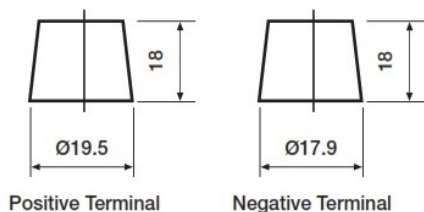

#### Cell Assembly Layout

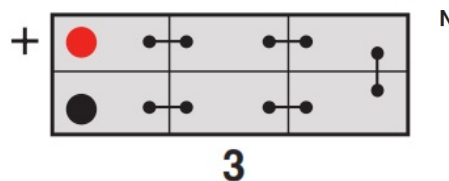

#### Battery Hold-down



Data Sheet generated on 11/02/2021 - E&OE