


REVISIONS

LTR	DESCRIPTION	SIGNATURE	AND DATE
		DWN	CHK
			AUTH

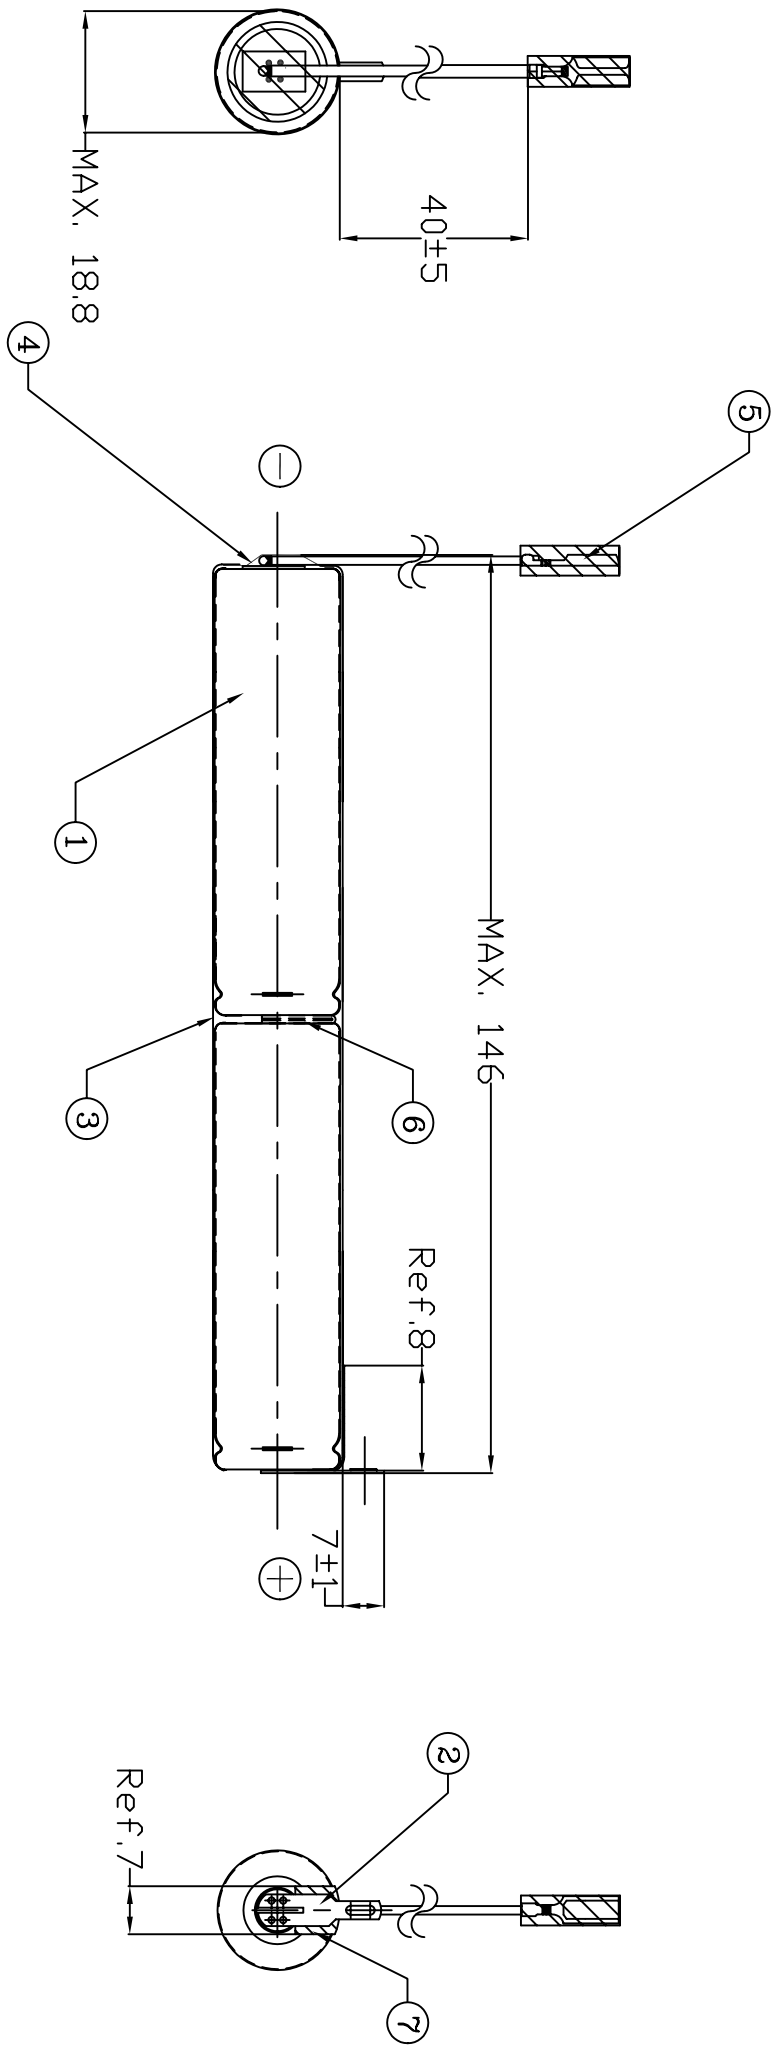

NO.	P/N	DESCRIPTION
7	TBA	HEAT RESISTANCE TAPE, W=7MM
6	NS15050	NICKEL STRIP, T=0.15MM
5	TBA	WIRE : AWG20, UL1015, BLACK
4	FP025018BLK	FIBRE PAPER, T=0.25MM, BLACK
3	SHRINK18030W	SHRINKAGE SLEEVE, W=30MM, WHITE
2	TAB192706	FASTON CONNECTOR, W=2.7MM
1	NT400LAHT	UNIT CELL

GP Batteries

TITLE: 1A SIZE PACK CONFIGURATION (2X)

SIGNATURE		DATE		MODEL NO.: GP400LAHT2AX		NOMINAL VOL TAGE: 2.4V	
DRAWN	KEVIN SHUM	19.AUG.03	19.AUG.03	Division :	PCD	CAPACITY:	4000mAh
CHKD	KEVIN SHUM	19.AUG.03	19.AUG.03	CELL TYPE:	400LA	SCALE:	Not in scale
APPD	GILBERT SIN	19.AUG.03	19.AUG.03	Page	2 of 2	DWG NO. :	ZED6645

DIMENSIONS ARE IN mm AND INCLUDE PLATED FINISHES
 * TOLERANCE REQUEST:
 ND DEC.PT. ±0.50
 1 DEC.PT. ± 0.10
 2 DEC.PT. ± 0.05

NOTICE:
 1. DO NOT SCALE THIS DRAWING
 2. REMOVE ALL SHARP EDGES
 UNLESS OTHERWISE SPECIFIED

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.