


**CARACTERISTIQUES ELECTRIQUES
ELECTRICAL CHARACTERISTICS**

Type	Rechargeable Nickel Metal Hydride	
IEC Designation	AA	
Plot / Top	Commercial Top	
Tension nominale / Nominal voltage	1.2V	
Tension mini en décharge / Mini discharge voltage	1V	
Charge standard 16h	250 mA	
Capacité nominale / Nominal Capacity	2550 mAh	
Capacité mini / Minimal Capacity	2500 mAh	
Courant de décharge maxi / Max continuous discharge current	2500 mA	
Cycle life at 80% DOD (0,5C)	> 500 (IEC standard)	
Resistance Interne / Internal Impedance (at 1000hz)	< 40 mΩ	
Température d'usage / Ambient temperature	Charge / Charging	0 to 45°C
	Décharge / Discharging	-20 to 60°C
Temperature de stockage / Storage temperature	-20 to 60°C (Humidity: 65 ± 20 %)	
Charge rapide / Fast charge	1250mA - ΔV=0.5mV/Cell	
Charge de maintien / Trickle charge	(0.05C)~(0.1C)	

**CARACTERISTIQUES PHYSIQUES
PHYSICAL CHARACTERISTICS**

Accumulateur / Battery	
Dimension (mm)	50.5 x 14.5 (+/- 1)
Poids / Weight (g.)	29

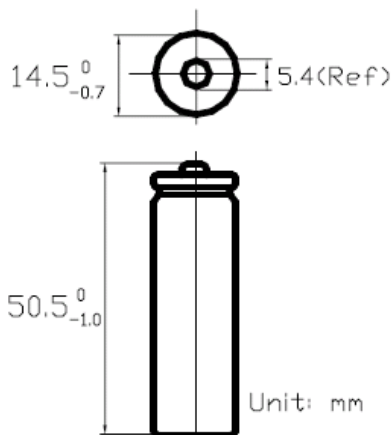