


SANYO

Cadnica

Cell Type KR-CH(2.5)

Specifications

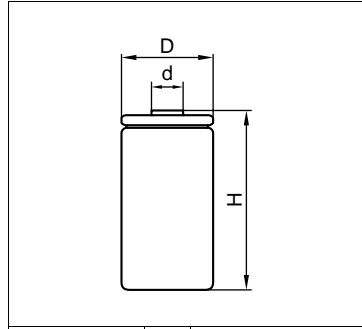


Dimensions of Bare Cell		H	49.0 ±0.3 mm	1.929 ±0.012 inch
D		25.2 ±0.3 mm	0.992 ±0.012 inch	
	d	8.5 mm	0.335 inch	


Nominal Capacity		2500mAh	
Nominal Voltage		1.2V	
Charging Current	Trickle	83mA	
	Standard	250mA	
Charging Time	Trickle	above 48Hrs.	
	Standard	14 to 16Hrs.	
Ambient Temperature	Charge	0°C to +70°C [+32°F to 158°F]	
	Discharge	-20°C to +70°C [-4°F to 158°F]	
	Storage	-30°C to +70°C [-22°F to 158°F]	
Internal Impedance (Av.) (at 50% discharge)		6.5mΩ (at 1000Hz)	
Weight		74g/2.61oz	
Dimensions(D)×(H) (with tube)		25.8 ⁰ _{-0.04} × 50.0 ⁰ _{-0.1} mm	1.02 ⁰ _{-0.06} × 1.97 ⁰ _{-0.06} inch

Typical Characteristics


Charge

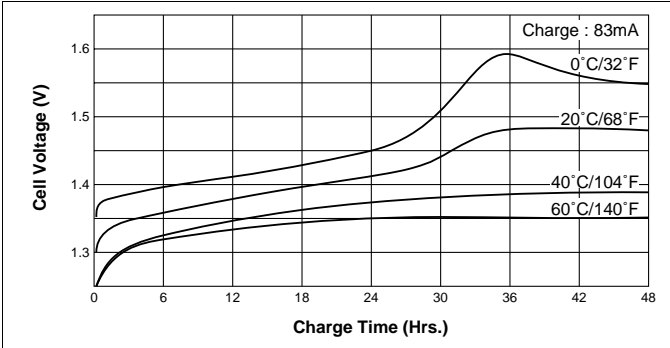


Discharge (at high rate)

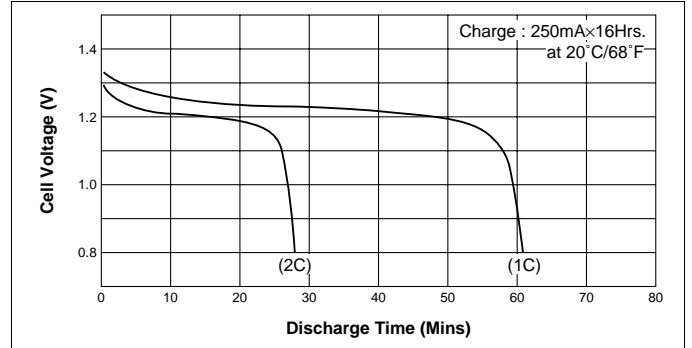


Charge

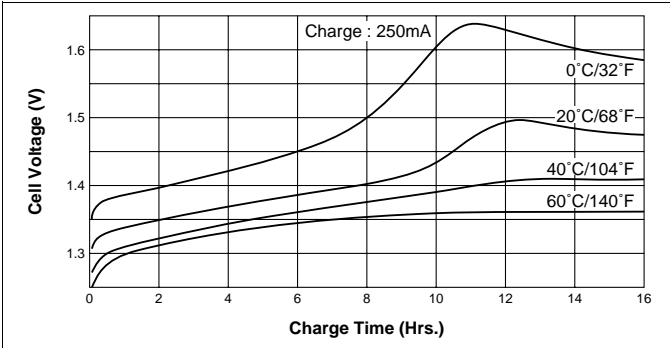

Discharge Trickle charge (at high temperature)

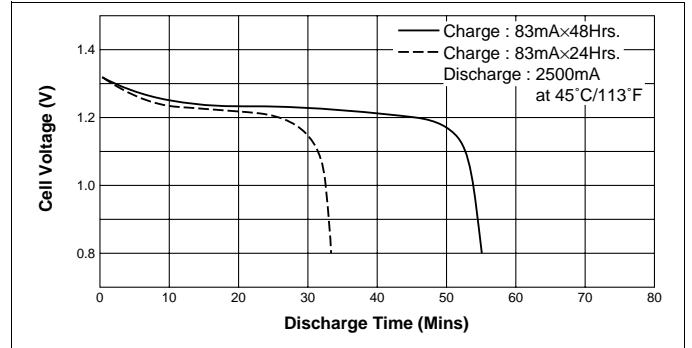

Discharge (at low rate)

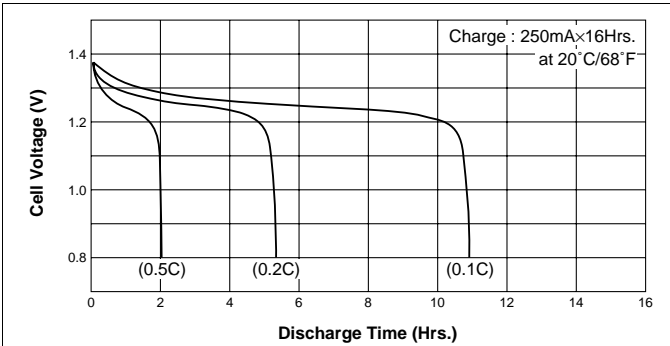

Temperature (Charge & Discharge)

