SANYO

Cadnica

Cell Type N-600AA

Specifications



Dimensions of Bare Cell	H	49.5 ±0.3	mm
		1.949 ±0.012	inch
	D	13.8 ±0.2	mm
		0.543 ±0.008	inch
	d	7.0	mm
		0.276	inch

Nominal Capacity			600mAh
Nominal Voltage			1.2V
Charging Current		Standard	60mA
		Quick	180mA
		Fast	900mA
Charging Time		Standard	14 to 16Hrs.
		Quick	4 to 6Hrs.
		Fast	about 1Hr.
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	10°C to +45°C [+50°F to 113°F]
		Fast	0°C to +45°C [+32°F to 113°F]
	Discharge		-20°C to +60°C [-4°F to 140°F]
	Storage		-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at. 50% discharge)			12.0mΩ (at 1000Hz)
Weight			23g/0.81oz
Dimensions(D)×(H) (with tube)			14.3 $^{0}_{-0.5}$ × 50.2 $^{0}_{-1}$ mm 0.56 $^{0}_{-0.02}$ × 1.98 $^{0}_{-0.04}$ inch

Typical Characteristics

Charge

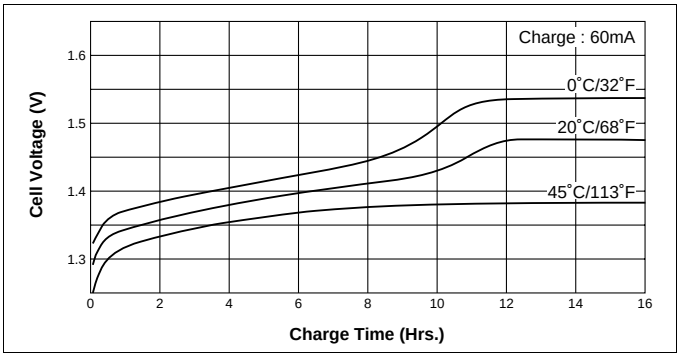

Discharge (at high rate)

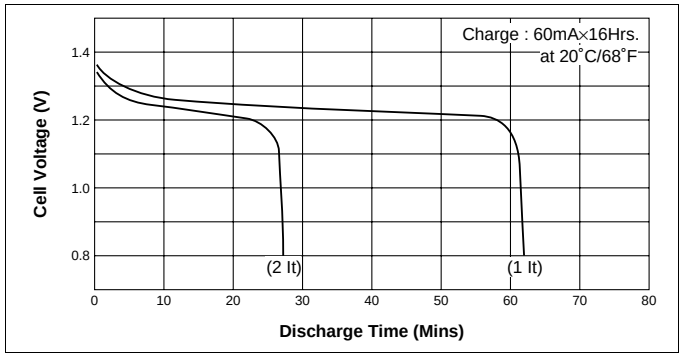

Charge

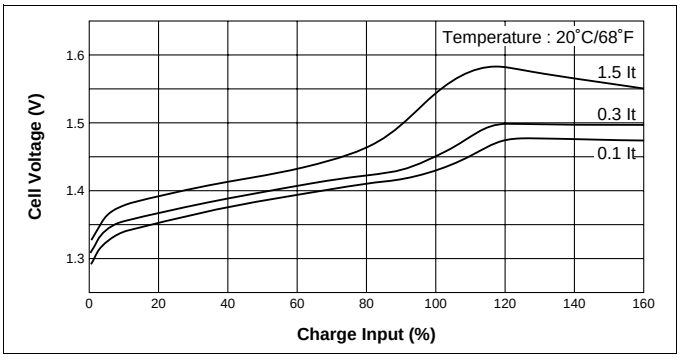

Discharge (at high rate)

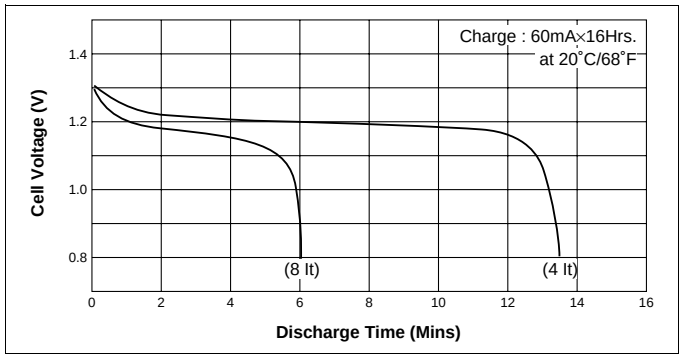

Discharge (at low rate)

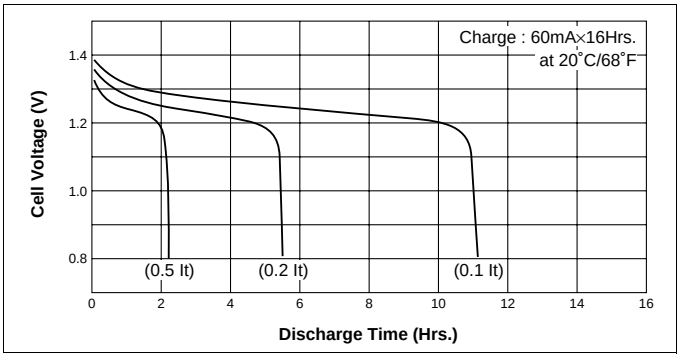

Temperature (Charge & Discharge)

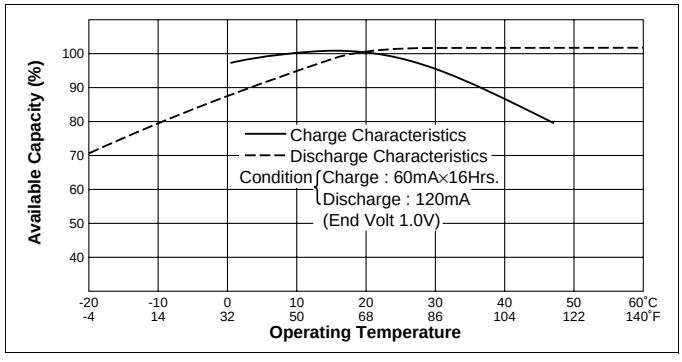

CD010830