



Yuasa Fiche de données techniques

Yuasa YBX3014 - Batteries SMF YBX3000

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Tension	12V
Capacité (20 heures)	60Ah
Performances en démarrage à froid (EN1)	500A

Dimensions

Longueur	232mm
Largeur	175mm
Hauteur	225mm

Poids & Mesures

Poids moyen avec acide	15.5kg
------------------------	--------



Caractéristiques du bac

Type de bac	JIS D23
Schéma de montage	1
Système de fixation	N
Indicateur de l'état de charge	✓
Poignées	✓
Sortie(s) d'aération	✓
Type de couvercle	Double capot (anti-écoulement et sans entretien)


Technologie

Dispositif stop-flamme	✓
Technologie	Ca/Ca
Séparateur	PE
Test de retournement VDA	✓
Taux de charge recommandé	4A
Performance Marking	W3-C2-V2-E1

Type de bornes

T1


Standard DIN Post

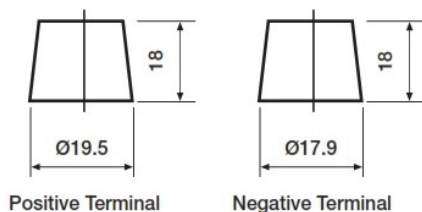

Positive Terminal

Negative Terminal

Schéma de montage des éléments

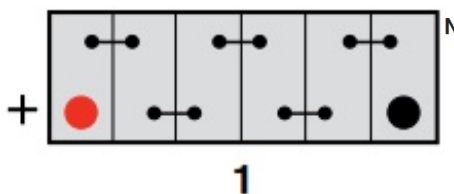

Système de fixation de la batterie



Date de publication: 10/02/2021 - E&OE



Yuasa Technical Data Sheet

Yuasa YBX3014 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	500A

Dimensions

Length	232mm
Width	175mm
Height	225mm

Weights & Measures

Mean Weight with Acid	15.5kg
-----------------------	--------



Container Features

Case Type	JIS D23
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	4A
Performance Marking	W3-C2-V2-E1


Terminal Type

T1

Standard DIN Post

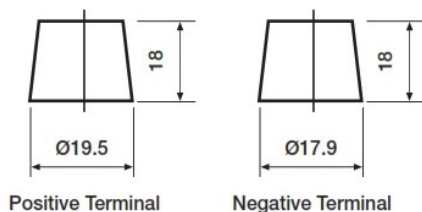

Cell Assembly Layout

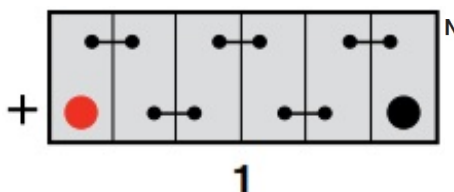

Battery Hold-down



Data Sheet generated on 10/02/2021 - E&OE