

NON-SPILLABLE

SLA

TERMINAL

Front



Side



Top



3D



SPECIFICATION

VOLTAGE

12v

CCA (EN)

100A

CAPACITY (20h)



6.8Ah

CAPACITY (10h)

6.5Ah

DIMENSIONS & WEIGHT

LENGTH	150±2mm
WIDTH	65±2mm
TOTAL HEIGHT	93±2mm
GROSS WEIGHT	2.39kg

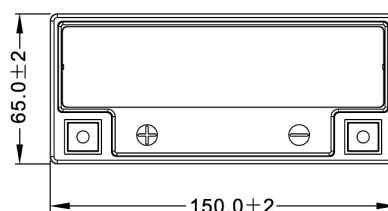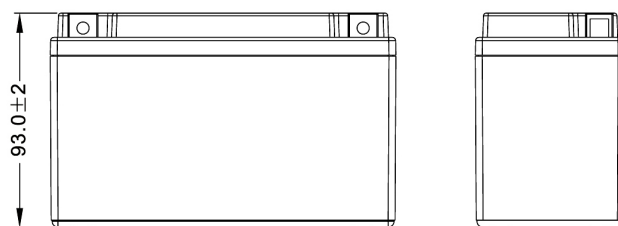

FEATURES

- READY TO USE
- AGM TECHNOLOGY
- WET CHARGED FACTORY ACTIVATED
- BATTERY VRLA (VALVE REGULATED LEAD ACID)
- NON SPILLABLE: EASY TO SHIP
- 100% MAINTENANCE FREE
- MULTI-POSITIONAL FITMENT
- MINIMIZED PLATE SULFATION
- SUITABLE FOR COLD WEATHER
- NO ACID HANDLING
- EASY TO INSTALL
- HIGHER LIFE CYCLE

POLARITY



MOUNTING ANGLES

