


ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	1,5 V
NOMINAL CAPACITY	1200 Ah
NOMINAL ENERGY	1560 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	500 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	2000 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1'')	4000 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	375 mAh

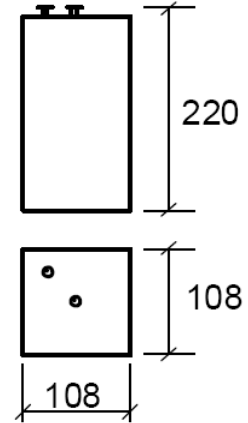

PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	108 mm
Width	108 mm
Height	200/220 mm
NET WEIGHT	4,12 Kg
VOLUME	2,33 dm ³
CASE MATERIAL	Plastic*
TERMINALS	Nº 1
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None


CAPACITY				
USE	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	3	24 H	0,9	1164
NORMAL	6	14 H	0,9	1164

- High impact polystyrene.

TYPICAL HEAVY SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME FORT

3 Ω - 24 HOURS / DAY - CUT OFF 0,9 VOLTS


3 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 0,9 VOLTS

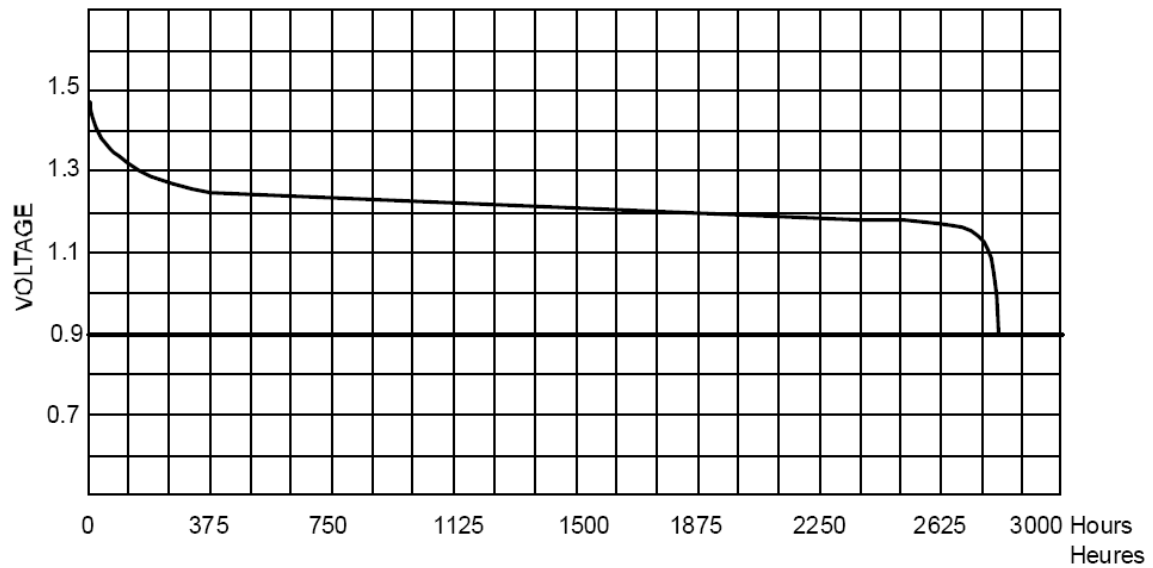


TYPICAL LIGHT SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME LENT

6 Ω - 14 HOURS / DAY - CUT OFF 0,9 VOLTS

6 Ω - 14 HEURES / JOUR - TENSION D'ARRÊT 0,9 VOLTS

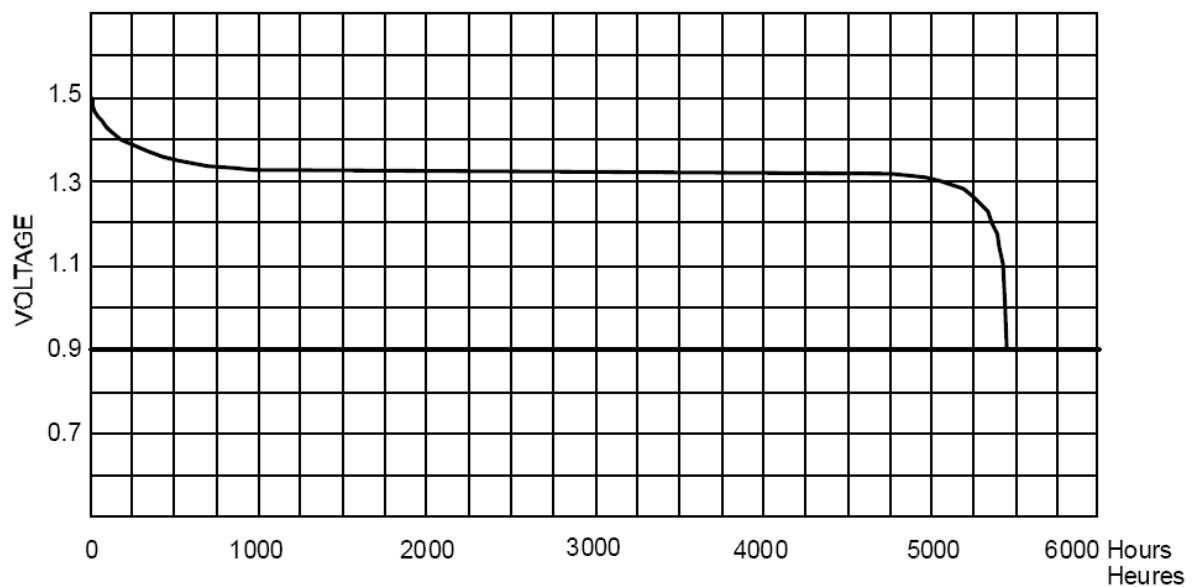

CAPACITY AS A FUNCTION OF TEMPERATURE AND DUTY
CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME

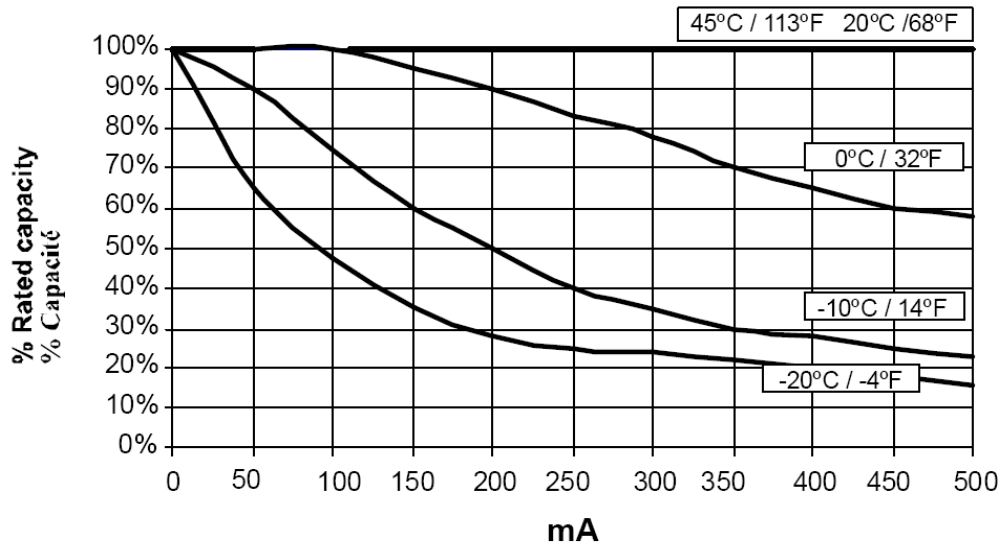

CAPACITY AS A FUNCTION OF SHELF LIFE
CAPACITÉ EN FONCTION DE LA CONSERVATION

YEARS ANNÉES	CAPACITY CAPACITÉ Ah
1	1140
2	1104