

EVEREADY 1209


6V
Lantern



General Information

Classification: Carbon Zinc Super Heavy Duty
Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
 No added mercury or cadmium
Designation: ANSI-908A IEC- 4LR25X
Nominal Voltage: 6.0 volts
Operating Temp: -18°C to 55°C (0°F to 130°F)
Typical Weight: 600 grams
Typical Volume: 492 cubic centimeters
Shelf Life: 3 years at 21C
Terminal: Coil Spring


Industry Standard Dimensions

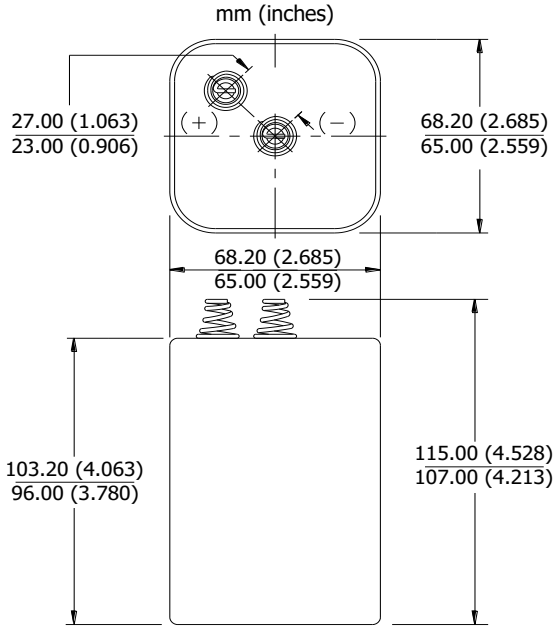

This battery shall pass freely through a cylindrical tube 82.6 diameter x 101.6 long.


Milliamp-Hours Capacity

Continuous discharge to 3.2 volts at 21°C

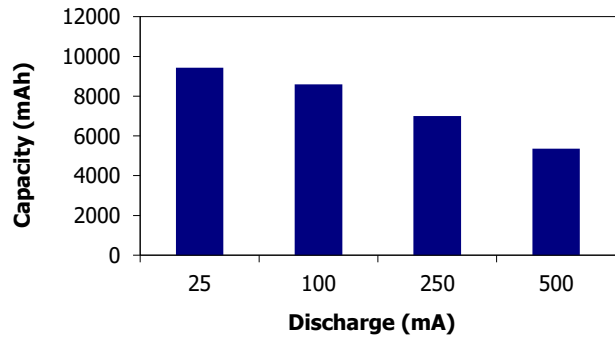

Industry Standard Tests (21°C)


STEADY BURN BARRICADE
110 ohm 12 hrs/day

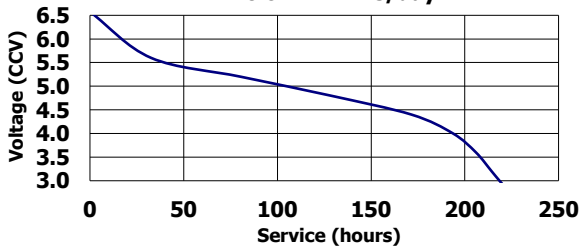

LIGHTING
9.1 ohm 30 min/hour 8 hrs/day



LIGHTING
33 ohm 30 min/hour 8 hrs/day

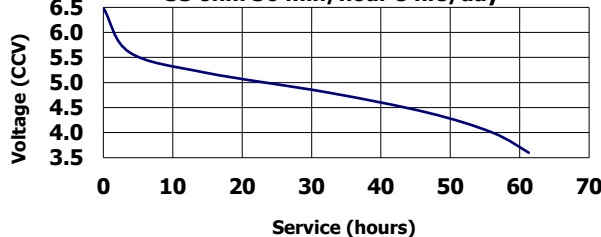

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.